



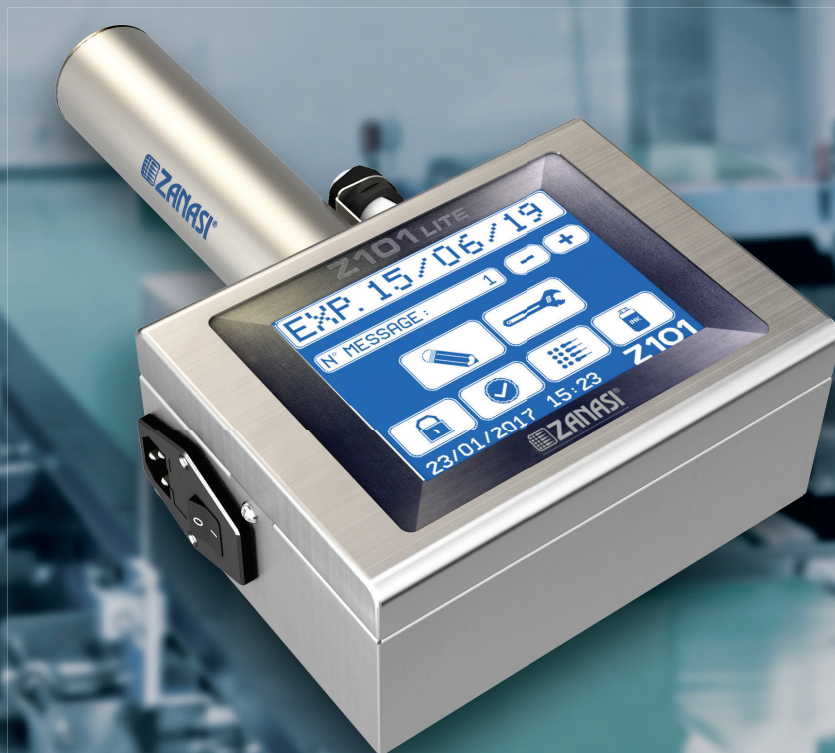

BSR idware

BSR idware GmbH
Jakob-Haringer-Str.3
A-5020 Salzburg
<https://www.bsr.at>
sales@bsr.at

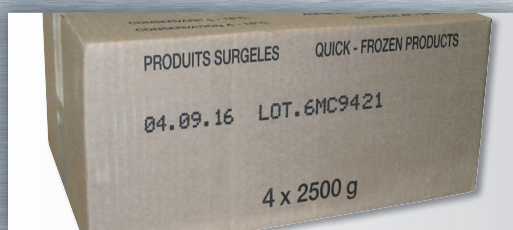

Main features

Printing type



Barcode



Logos



Alphanumeric text

Maximum height



0-15 mm



7-20 mm



Above 100 mm

Printing surfaces



Primary packaging



Secondary packaging



Raw material

- **Light:** compact design in less than 3 Kg (6 lbs) for an easy integration on all production lines.
- **Intelligent:** single adjustable printhead from 7 to 20 mm (0,28" - 0,79") print height. The flexible and intuitive interface enables an easy print control from a 5,7" touch screen panel.
- **Tiny:** all-in-one design with integrated sensor, no need of factory air.
- **Economic:** best price/quality ratio of its segment, very low cost-per-print and initial investment thanks to the renowned robust solenoid printhead technology.

Z101 LITE

TECHNICAL SPECIFICATIONS



BSR idware GmbH

Jakob-Haringer-Str.3

A-5020 Salzburg

<https://www.bsr.at>

sales@bsr.at

PRINTING CHARACTERISTICS

- Single line coding with 7 dot printhead
- Print height from 7 to 20 mm (0,28" – 0,79")
- Line speed capability: up to 60 mt/min (197 ft/min)
- Printing rate: up to 150 ct/sec
- 100 messages storage
- 80 characters for each message
- Available fonts: 5x5 and 7x5
- Bold factor: up to 5 times
- Automatic calendar and expiration date print
- Incrementing/decreasing products counter up to 9 digits
- Repeat - message function
- Printing in all moving directions
- 180° text rotation
- Coding throw distance up to 25 mm (0,98")

CONTROL UNIT CHARACTERISTICS

- Internal pump for ink pressurization
- 5,7" touch screen panel with backlit color LCD (640 x 480) display
- Stainless steel structure AISI 304

GENERAL FEATURES

- Intuitive ease of use software interface
- Print parameters storage in the messages
- Report function for executed printing counter
- Keypad access with password
- Built-in multiple languages and alphabets
- Single nozzle purge and printing functions selectable from touch screen panel
- Inks for both porous and non porous surfaces

PRINthead


- Serviceable and replaceable
- High efficiency and accuracy solenoid technology
- Slant function for multiple print sizes
- Stainless steel structure AISI 304
- Dimensions: length 196 mm, ø 50 mm (length 7,7", ø 2")

EXTERNAL CONNECTIONS

- Serial connection: RS232 (optional)
- Integrated optical sensor for product reading
- External alarm outputs for low ink level

ENVIRONMENT/ELECTRICAL REQUIREMENTS

- Temperature: 5° - 45°C (41°-113°F)
- Humidity: 0 - 90% (non-condensing)
- Single Phase, 85-240 Vac, 50-60 Hz, 30 VA

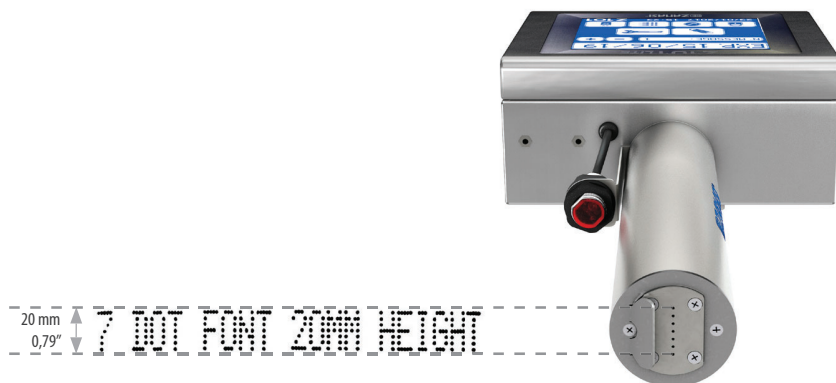

Use a QR code reader to see the product page

Zanasi S.r.l.
Via Marche, 10
41049 Sassuolo (MO) Italy
Tel. +39 0536 999711
Fax +39 0536 999765
www.zanasi.it - info@zanasi.it

Zanasi USA
www.zanasiusa.com

Zanasi China
www.zanasicchina.com

ZANASI®
make your mark
www.zanasi.it